


COMMERCIAL/INDUSTRIAL


ALTUS SERIES




MOUNTING OPTIONS & DIMENSIONS (Weights shown may vary with mounting options)

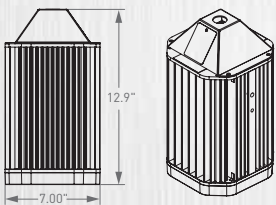

ALTUS
With Pendant Mount (PDH). Weight: 19lbs

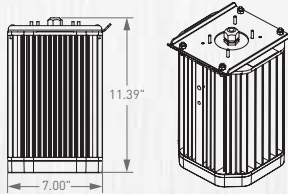

ALTUS
With Ceiling Mount (CL). Weight: 19lbs

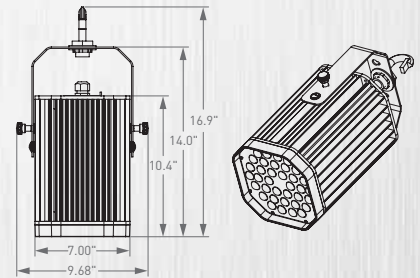

ALTUS
With Free Hang Mount (FR). Weight: 19lbs

LIGHTING SOLUTIONS THAT OUTSHINE ALL OTHERS. 

▶ 315.579.2873 ▶ EphesusLighting.com

ALTUS SERIES


The Altus series is engineered for unbeatable workhorse performance in even the harshest industrial and commercial environments — virtually anywhere that dirty, wet and corrosive elements can really take their toll. Built to last and outperform, all while using 75% less energy.

	ALTUS 80		ALTUS 120		ALTUS 140	
Lumen Output ¹	7,517		10,850		13,768	
System Watts	80		120		120	
Efficacy	94		90		114	
Input Voltage	VL:90-277VAC	120-430VDC	VL:90-277VAC	120-430VDC	VL:90-277VAC	120-430VDC
Power Factor	>0.92		>0.95		>0.95	
CRI	>75		>80		>80	
CCT	5000K		5000K		5700K	
Operating Temp	-40°C to 55°C		-40°C to 55°C		-40°C to 55°C	
L70 Hours	>225,000 hours		>225,000 hours		>225,000 hours	
IP Rating	IP69		IP69		IP69	

ILLUMINATION TABLES ²

ALTUS 80 - Average Illumination (FC)						ALTUS 120 - Average Illumination (FC)						ALTUS 140 - Average Illumination (FC)					
Height	Spacing					Height	Spacing					Height	Spacing				
	15 FT	20 FT	25 FT	30 FT	35 FT		15 FT	20 FT	25 FT	30 FT	35 FT		15 FT	20 FT	25 FT	30 FT	35 FT
10 FT	34	19	12	9	7	10 FT	51	28	18	13	10	10 FT	68	38	25	17	14
15 FT	33	18	12	8	7	15 FT	49	28	18	12	10	15 FT	66	37	24	17	13
20 FT	32	18	11	8	6	20 FT	48	27	17	12	10	20 FT	64	36	23	16	13
25 FT	31	17	11	8	6	25 FT	46	26	17	12	9	25 FT	62	35	22	16	13
30 FT	30	17	11	8	6	30 FT	45	25	16	11	9	30 FT	60	34	22	15	12

STANDARD PRODUCTS, OPTIONS AND ORDERING LOGIC

STANDARD PRODUCT								
Model	Product Code	CCT	Finish	Voltage	Mounting	Optics	Cabling	Accessories
Altus 80	ALT80	N	BLK	VL	PDH	5W	N06	N
Altus 120	ALT120	N	BLK	VL	PDH	5W	N06	N
Altus 180	ALT140	N	BLK	VL	PDH	5W	N06	N
		N	BLK			5W		N
Available Options				VL VH ³	PDH (Pendant Mount) CL (Ceiling Mount) FR (Free Hanging)		N (No plug, ##=Cable length in feet)	N (None) OCC (Occupancy Sensor)

Notes ¹ The specifications listed were obtained under optimal testing conditions. Changes in options, features and conditions may result in slightly different performance specifications among fixtures.

² Data based on a 300' x 300' room, 80/50/20 reflectance.

³ VH:277-582VAC



Representante
 Bosque de Duraznos #69 - Torre B 1107-A
 Col. Bosques de las Lomas, México DF. 11700
 Tel: +52 55 5251 2008
 ventas@bhpenergy.mx /

© 2015 BHP Energy México Todos Los Derechos Reservados