

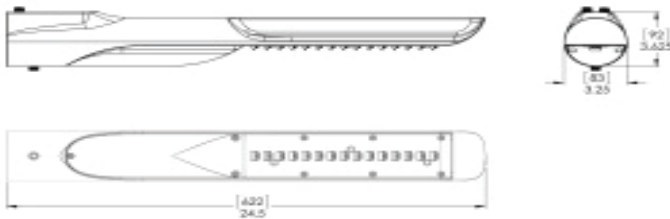


Benefits

The Roadway Mini™ was designed with simplicity in mind. Its minimalist approach saves on everything from material to energy while providing the same or better quality light as a 100 watt HID fixture.




- Standard offerings replace up to 100W HID sources
- IP66
- Class leading efficiency with over 100 lumens per watt
- Optics: Type II distribution
- Minimalist design reduces material and installation costs

Dimensions



ROADWAY MINI

Features

Wattage	40W, 70W
Lumen Output Range (4000K)	4000, 6300
Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	70
Rated Life L70	>50,000 hrs @ 35°C
Housing	Die Cast Aluminum
Finish	Grey, Black, Bronze Powder Coat
Optical Distributions	Type II
Mounting Options	Fits standard 1-1/4" to 2" nominal diameter mast arm 38 - 61 mm
Dimensions	24.5"L x 3.25" Diameter 622.3mm x 82.55mm
EPA (Sq. ft.)	0.5
Weight	5lbs
Driver Voltage	90-305 VAC @ 50-60 Hz
Operating Temperature ²	-25°C to +50°C (-13°F to +122°F)
Power Factor (PF)	≥0.9
Total Harmonic Distortion (THD)	<20%
Off State Power	0
Warranty	10 Year Limited
Certifications	  3G Vibration Rating
Environment	 IP65 Complete Assembly

¹ Consult www.lsgc.com for IES and LM-79 reports

² 3000K has reduced blue content for lower glare and reduced biological effects.

³ -40°C for operation 230 volts or higher. Outdoor applications only.