

VARIETA FLOOD LIGHT

SINGLE ARRAY

U.8.12.14

APPLICATION:

Accent lighting for exterior retail, commercial and hospitality environments

CONSTRUCTION:

- Die-Cast aluminum faceplate
- Extruded aluminum enclosure
- IP67 sealed optical modules

ELECTRICAL:

Integral driver
Input voltage 120v-277v auto-sensing
Power consumption 31W
1/2" NPT wire entry
Standard product is shipped as non-dimming unless specified

OPTICS:

- Lumen maintenance: 70% @ 50,000 hours
- 1 lens module containing 16 LEDs available in a number of symmetric or asymmetric axial beam spread patterns

MOUNTING:

- Cast aluminum pivot
- 180° tilt
- 360° rotation

AMBIENT OPERATING RANGE:

-30°C to 40°C

WEIGHT:

5 lbs

EPA:



0.25

FL1
LED




PROJECT:

TYPE:



MOUNTING:

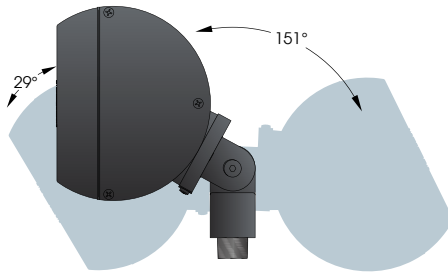

EXTERNAL GLARE SHIELD



ORDERING INFORMATION:

Model	Light Distribution	CCT	CRI	Approx. Lumens	Total Efficacy	Finish	Accessories	Dimming Option
FL1	NSP	30 (3,000K)	80	2,580	83 Lm/W	BLK CLB GRN TBK WHT	EGS -Ext Glare Shield	DM (0-10 volt)
		40 (4,000K)	80	2,940	94 Lm/W			
		50 (5,000K)	70	3,020	97 Lm/W			
	HMS VMS	30 (3,000K)	80	2,340	75 Lm/W			
		40 (4,000K)	80	2,670	86 Lm/W			
		50 (5,000K)	70	2,740	88 Lm/W			
	HWS VWS	30 (3,000K)	80	2,260	72 Lm/W			
		40 (4,000K)	80	2,580	83 Lm/W			
		50 (5,000K)	70	2,640	85 Lm/W			
	SQS	30 (3,000K)	80	2,270	73 Lm/W			
		40 (4,000K)	80	2,580	82 Lm/W			
		50 (5,000K)	70	2,650	85 Lm/W			
	MFL	30 (3,000K)	80	2,710	87 Lm/W			
		40 (4,000K)	80	3,090	99 Lm/W			
		50 (5,000K)	70	3,170	102 Lm/W			
	HMF VMF	30 (3,000K)	80	2,490	80 Lm/W			
		40 (4,000K)	80	2,840	91 Lm/W			
		50 (5,000K)	70	2,920	94 Lm/W			
	HWF VWF	30 (3,000K)	80	2,420	78 Lm/W			
		40 (4,000K)	80	2,760	89 Lm/W			
		50 (5,000K)	70	2,830	91 Lm/W			
	SQF	30 (3,000K)	80	2,460	79 Lm/W			
		40 (4,000K)	80	2,800	90 Lm/W			
		50 (5,000K)	70	2,870	92 Lm/W			



Electrostatic sensitive device.
observe precautions for handling

10 year limited warranty
AMERLUX LED




Part String

Example: FL1/NSP/30/BLK/EGS/DM

Amerlux reserves the right to change details that do not affect overall function and performance.


MOUNTING ACCESSORIES:

CANOPY MOUNT




WMC24
Mounting hardware
not included

WALL MOUNT




WMS14
Mounting hardware
not included

POLE MOUNT





PMBS-2-18


GROUND SPIKE




GSP-17



EPA: 0.208




EPA: 0.513




OPTICAL PERFORMANCE:


Narrow Spot NSP




Square Spot SQS




Medium Flood MFL




Square Flood SQF




Horizontal Wide Spot HWS




Vertical Wide Spot VWS




Horizontal Medium Flood HMF




Vertical Medium Flood VMF

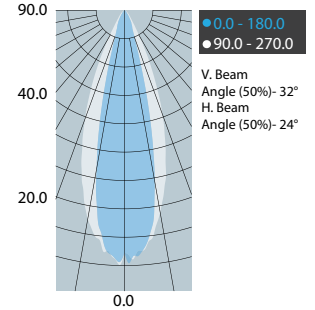


Horizontal Medium Spot HMS




Vertical Medium Spot VMS



Horizontal Wide Flood HWF

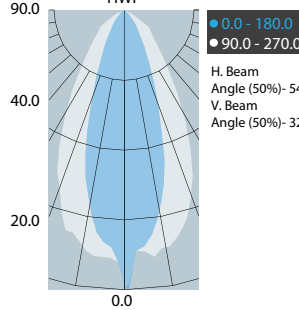

Vertical Wide Flood VWF



Representante Exclusivo
BHP Energy México S. de R.L de C.V

Bosque de Duraznos #69 - Torre B 1107-A, Col.Bosques de las Lomas, México DF. 11700
Tel: +52 55 5251 2008 / info@bhpenergy.mx / ventas@bhpenergy.mx / www.bhpenergy.mx