

ACION

SMALL LED ACCENT

U.5.1.15

The Amerlux Accent luminaire employs solid state technology and precision engineering to provide small scale LED solutions in landscape and architecture layouts. All components are encapsulated inside a single attractive enclosure designed for superior performance in weather resistant applications. Offered in a choice of beam spreads, finishes, and color temperatures, two mounting options and glare shield are also available.

CONSTRUCTION:

- IP67 sealed optical chamber and integral driver chamber
- Easy "two-screw" integral driver access, does not disturb optical chamber seal
- Flush lens prevents puddles/water deposits in upward facing applications
- Yoke mount or Knuckle mount available
- Vertical aiming lock, with tamper-resistant tooled locking after final aiming

OPTICS:

- Lumen maintenance: 70% @ 50,000 hours
- 10 ,15 ,30 ,40 ,60 ,60x10,60x30,90x60 beam spreads are available with secondary shaping lens
- HGS - Half external glare-shield field installable

ELECTRICAL:

Integral driver
 Input voltage 120v-277v auto-sensing
 1/2" NPSM wire entry
 Drive current 700mA
 Power consumption 10W
 ELV dimmable at 120v only


ACCS
LED



PROJECT:


TYPE:

POLAR GRAPH

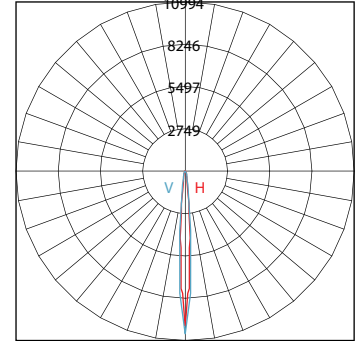

Maximum Candela = 10994
 Located At Horizontal Angle = 1, Vertical Angle = -2.5
 H - Horizontal Axial Candela
 V - Vertical Axial Candela

Knuckle Mount (K)

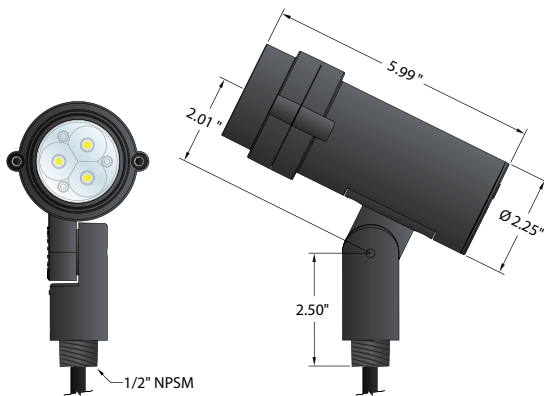

Yoke Mount (Y)



ORDERING INFORMATION:

| Model | CCT | CRI | Approximate Lumens | Total Efficacy | Mounting | Finish | Accessories |
|-------|-------------|-----|--------------------|----------------|-------------------------|----------------------------------|--------------------------|
| ACCS | 27 (2,700K) | 80 | 550 lm | 55 lm/W | K (Knuckle) Y (Yoke) | BLK,CLB GRN,TBK WHT,Custom | HGL Half Glare Shield |
| | 30 (3,000K) | 80 | 610 lm | 61 lm/W | | | |
| | 40 (4,000K) | 70 | 700 lm | 70 lm/W | | | |

Ordering options in BOLD



10 year limited warranty
AMERLUX LED



Part String

Example: ACCS / 30 / K / BLK

Representante Exclusivo

BHP Energy México S. de R.L de C.V

Bosque de Durazos #69 - Torre B 1107-A, Col.Bosques de las Lomas, México DF. 11700
 Tel: +52 55 5251 2008 / info@bhpenery.mx / ventas@bhpenery.mx / www.bhpenery.mx

