

CHAPERONE

LED INDIRECT GARAGE LUMINAIRE

U.5.1.15

The Amerlux Garage Luminaire is designed to replace ceiling mounted garage fixtures as a complete LED luminaire solution. The luminaire is designed to be an ideal energy savings and light quality replacement for linear fluorescent, HID or Metal halide fixtures. Unlike most direct lighting garage fixtures today, that tend to provide an unattractive glare, the Amerlux luminaire uses indirect light technology to reduce glare, improve performance and quality of light. This new garage light is instant on, and can be integrated with many different control system options in the market today.

CONSTRUCTION:

- Die-Cast aluminum housing for long lasting durability
- Die-Cast aluminum heatsink for maximum thermal protection
- Acrylic Lens

OPTICS:

- Type III and Type V available
- Indirect LED light output reduces glare from luminaire
- Single LED board design allows for ease of replacement

ELECTRICAL:

- Integral driver
- Input voltage 120v-277v auto-sensing
- Power consumption 48W and 80W
- Controls compatible

MOUNTING:

- Junction box/pendant mount is standard (3/4" NPT stem by others)
- HM - Hook mount
- T - Trunion mount

FINISH:

Premium quality thermoset polyester powdercoat for a durable finish in the following:

- Standard: SLV - Silver Premium: CSTM - Custom (consult factory)

ACCESSORY:

BG - Bird guard

DISTRIBUTION:

T3 - Type III
T5 - Type V

LIFE:

50,000+ hours

EFFICACY:

Up to 81 lumens/ watt

CCT:


4000K, 5000K

WEIGHT:

13 lbs



Specifications subject to change, based on final design and components.

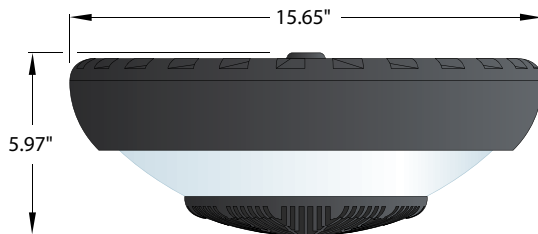


G300
LED




PROJECT:

TYPE:

TYPEIII

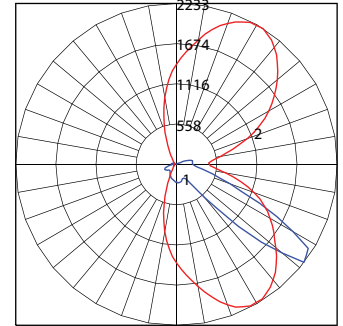

TYPEV

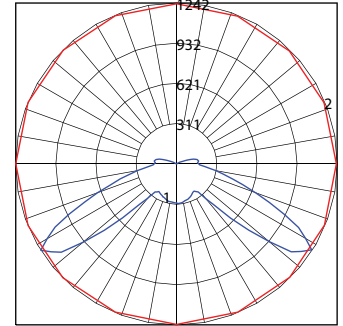

Electrostatic sensitive device.
observe precautions for handling

10 year limited warranty
AMERLUX LED

ORDERING INFORMATION:

Model	Light Dist.	Code	CRI	Approx. Lumens	Total Efficacy	Nominal Input Power	Mounting Options	Finish	Accessory
G300	T3	4L (4,000K)	80	3,890	81 Lm/W	48W	T (Trunion) HM (Hook)	SLV CSTM	BG (Bird Guard)
		5L (5,000K)	80	3,890	81 Lm/W				
	T5	4H (4,000K)	80	5,680	71 Lm/W	80W			
		5H (5,000K)	80	5,680	71 Lm/W				

Ordering options in BOLD

Part String

Example: G300/T5/4H/SLV

Representante Exclusivo
BHP Energy México S. de R.L de C.V

Bosque de Durazos #69 - Torre B 1107-A, Col. Bosques de las Lomas, México DF. 11700
Tel: +52 55 5251 2008 / info@bhpenergy.mx / ventas@bhpenergy.mx / www.bhpenergy.mx

