

# INSIGNA

## THREE MODULE LINEAR SYSTEM LED

U.5.1.15

### APPLICATION:

Architectural flood lighting for exterior signage, wall washing, and landscape

### CONSTRUCTION:

- Die-Cast aluminum faceplate
- Extruded aluminum enclosure
- IP67 sealed optical modules

### ELECTRICAL:

Integral drivers  
Input voltage 120v-277v auto-sensing

### AMBIENT OPERATING RANGE:

-30°C to 40°C

### OPTICS:

- Lumen maintenance: 70% @ 50,000 hours
- Variety of lens modules containing LEDs are available in a number of symmetric or asymmetric axial beam spread patterns

### MOUNTING:

Direct Mount is standard  
TM - Tenon Mount  
MM - Mast Mount

### FINISH:

Premium quality thermoset polyester powdercoat for a durable finish in the following:


ANT -Anthracite (Metallic Charcoal Gray)      SDS -Silver  
BLK -Satin Black      TBK -Textured Black  
CLB -Classic Bronze      WHT -White

LSL18  
LED




PROJECT:

TYPE:

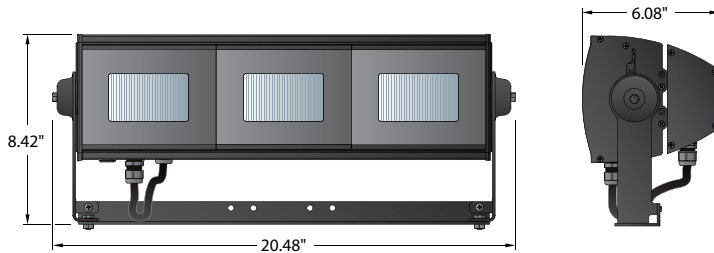

LSL18 / FLC

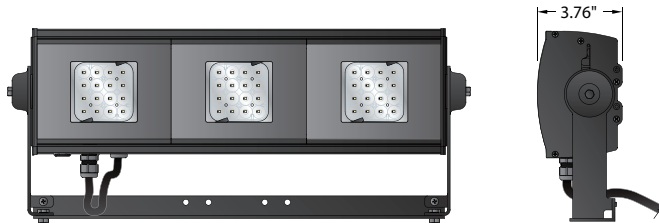

LSL18 / MFL / DR  
(3x16 LED modules / Remote Driver)

### ORDERING INFORMATION: Lumen values shown below are preliminary.

Model	Light Dist.	CCT	CRI	Approx. Lumens	Total Efficacy	Nominal Input Power	Mount Option	Driver Option	Accessories	Finish
LSL18	FLC	30 (3,000K)	80	10,190	76 Lm/W	135W	TM MM	DR Remote Driver	EGS Ext. Glare Shield	ANT BLK CLB SDS TBK WHT
		40 (4,000K)	80	11,320	84 Lm/W					
		50 (5,000K)	80	11,550	86 Lm/W					
	MFL	30 (3,000K)	80	8,740	72 Lm/W	121W				
		40 (4,000K)	80	9,720	80 Lm/W					
		50 (5,000K)	70	10,690	88 Lm/W					

Ordering options shown as **BOLD**



**10** year limited warranty  
AMERLUX LED



Part String

Example: LSL18/FLC/50/TM/BLK

Representante Exclusivo  
BHP Energy México S. de R.L de C.V



Bosque de Duraznos #69 - Torre B 1107-A, Col.Bosques de las Lomas, México DF. 11700  
Tel: +52 55 5251 2008 / info@bhpenergy.mx / ventas@bhpenergy.mx / www.bhpenergy.mx