


2'x4' Product Description

The NEXTPanel LED Luminaire provides highly-uniform illumination for retrofit or new construction while delivering an attractive ROI. NEXTPanels are powered by external drivers to deliver a reliable solution that is fully-compatible with dimming and lighting automation systems. NEXTPanels are a perfect solution for retail, commercial, municipal and industrial customers where appearance, energy savings and long-life are of the utmost importance.

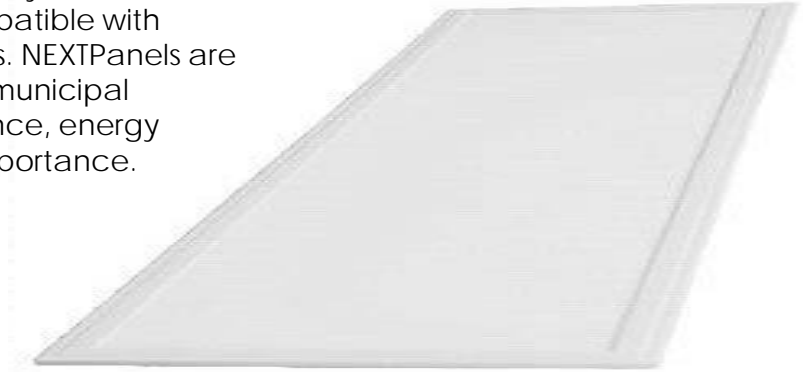

Performance Summary

Efficiency:	Up to 111 lumens per Watt
Light Output:	Up to 6135 lumens
Input Power:	55 Watts
CRI:	80+ (90+ version also available)
CCT:	3000K, 4000K and 5000K
Input Voltage:	120 – 277 Volts
Rated Life:	50,000 hours L ₇₀
Controls:	Dimmable, compatible with lighting control systems; 0 – 10V standard input
Mounting:	T-bar, flanged and pendant mounting options available
Limited Warranty:	5 years

Features:

- Soft uniform light
- Modern design
- Designed for ease of installation
- Dimmable
- Compatible with sensors and lighting automation
- External, Class 2 (low voltage) driver design

Applications:

- Retail
- Grocery
- Office
- Schools



Performance

NEXTPanel	Input(V)	Lumens	System Watts	lm/W	CCT (K)	Dimensions
NP24-UNV-55-830-00-001	120-277	6110	55	111	3000	2' x 4'
NP24-UNV-55-840-00-001	120-277	6120	55	111	4000	2' x 4'
NP24-UNV-55-850-00-001	120-277	6135	55	111	5000	2' x 4'



Class 2, external, dimmable drivers ensure high-performance, ultimate safety, control and long-life.

NEXTPanel Ordering Guide

NEXTPanel Dimensions	Voltage	Wattage	CRI and CCT	Mounting	Other
NP24 2'x4'	UNV Universal voltage (120 - 277 V)	WW Watts	8YY = 80+ CRI 830 = 3000K CCT 840 = 4000K CCT 850 = 5000K CCT	01 = Standard T-bar (non-air handling) 02 = Suspended 03 = Flanged hard-ceiling kit	001 = Reserved for custom configuration

NEXTPanel Ordering Examples

NP24-UNV-55-830-01-001	2'x4', Universal Voltage, 55W, 80+ CRI, 3000K, Standard T-bar mounting
NP24-UNV-55-840-01-001	2'x4', Universal Voltage, 55W, 80+ CRI, 4000K, Standard T-bar mounting
NP24-UNV-55-850-01-001	2'x4', Universal Voltage, 55W, 80+ CRI, 5000K, Standard T-bar mounting
NP24-UNV-55-830-02-001	2'x4', Universal Voltage, 55W, 80+ CRI, 3000K, Suspended mounting
NP24-UNV-55-840-02-001	2'x4', Universal Voltage, 55W, 80+ CRI, 4000K, Suspended mounting
NP24-UNV-55-850-02-001	2'x4', Universal Voltage, 55W, 80+ CRI, 5000K, Suspended mounting
NP24-UNV-55-830-03-001	2'x4', Universal Voltage, 55W, 80+ CRI, 3000K, Flanged hard-ceiling mounting
NP24-UNV-55-840-03-001	2'x4', Universal Voltage, 55W, 80+ CRI, 4000K, Flanged hard-ceiling mounting
NP24-UNV-55-850-03-001	2'x4', Universal Voltage, 55W, 80+ CRI, 5000K, Flanged hard-ceiling mounting

Representante Exclusivo



Bosque de Duraznos #69 - Torre B 1107-A
Col. Bosques de las Lomas, México DF. 11700
Tel: +52 55 5251 2008
ventas@bhpenery.mx

© 2016 BHP Energy México Todos Los Derechos Reservados
www.bhpenery.mx

