

# SLIMBAR 12

## LED HORIZONTAL REFRIGERATED CASE LIGHTING SYSTEM

### APPLICATIONS:

Supermarket horizontal case lighting

### CONSTRUCTION:

Durable anodized aluminum housing

### OPTICS:

High output 1/2w LEDs for maximum efficiency

High CRI

12 LEDs per foot

Polycarbonate lens 30°, 45° or 120° distribution

Color temps available: 2800K, 3500K, 4100K

Lumen Output (per ft): 300 lm (2800K)

381 lm (3500K)

400 lm (4100K)

### ELECTRICAL:

Low voltage 24v DC

Remote driver required

### MOUNTING:

Fixed clip mounting or adjustable clip with locking mounting

### LABELING:





Damp location rated

SB12-WL  
LED



PROJECT:

TYPE:

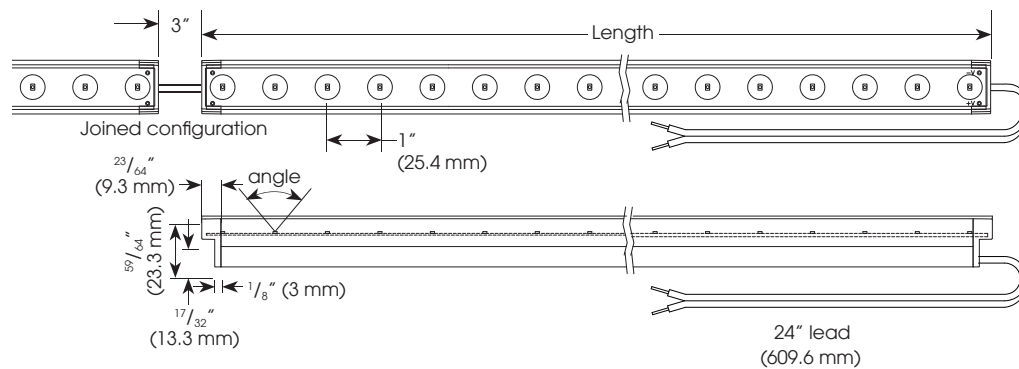


### ELECTRICAL


Electronic driver

Wattage per Foot: 6.5

### Remote Driver



### NEMA Enclosure

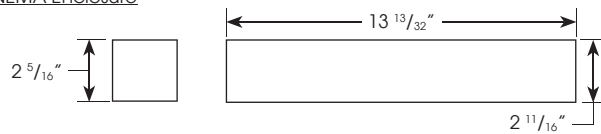

Electrostatic sensitive device,  
observe precautions for  
handling

**5** year limited  
warranty  
AMERLUX LED

(see website for details)

### ORDERING INFORMATION:

SlimBar Model	Wattage	Length	Color Temp	Beam Spread	Voltage	Leader	Power Supply (ordered separately)	Options (ordered separately)
SB12	1/2W	48" - 4' case 66" - 6' case 96" - 8' case (2-46" joined) 132" - 12' case (2-66" joined)	28K 35K 41K	120D - 120 degrees (standard) 30D - 30 degrees 45D - 45 degrees	24v	WL - wire lead (24")	PS-80 PS-100	NE - driver NEMA enclosure

### Mounting Options (order separately, 2 per 4' min)

- SB-FLAT-CLIP - fixed mounting
- SB-ROTO-CLIP - adjustable mounting
- SB-METAL-CLIP - metal fixed mounting
- SB-MAGNET-CLIP - magnetic fixed mounting

SlimBar Example: SB12-1/2W-66-35K-24V-WL

Power Supply Example: PS100-0-10V

Mounting Example: SB-FLAT-CLIP

Cat #:

Amerlux reserves the right to change details that do not affect overall function and performance.



# SLIMBAR 12

LED HORIZONTAL REFRIGERATED CASE LIGHTING SYSTEM

SB12-WL  
LED



TYPE:



## OPTIONS:

### DRIVER



PS80 Driver  
# PS-LED120A0024V33F

### DRIVER




PS100 Driver  
# PS-LEDINTA0024V41FO



NE - NEMA enclosure  
# PS-LED1003R1543

## MOUNTING:



Flat Clip (Fixed Mounting)  
# SB-FLAT-CLIP



Metal Fixed Clip  
# SB-METAL-CLIP  
(if required by local code)



Roto Clip (Adjustable Mounting)  
# SB-ROTO-CLIP



Magnetic Fixed Clip  
# SB-MAGNET-CLIP  
(if required by local code)

LIT-1367 rev 10/13

Representante Exclusivo  
BHP Energy México S. de R.L de C.V  
Bosque de Duraznos #69 - Torre B 1107-A, Col.Bosques de las Lomas, México DF. 11700  
Tel: +52 55 5251 2008 / info@bhpenergy.mx / ventas@bhpenergy.mx / www.bhpenergy.mx